



Model: ICM-27W

27" Industrial Chassis Monitor
(Wide screen)

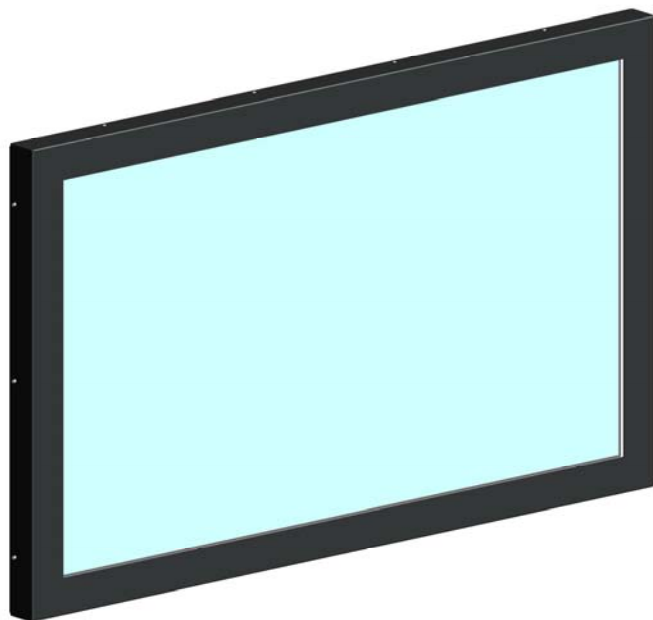

ICM-27WT

27" Industrial Chassis Monitor
with Touch screen (Wide screen)

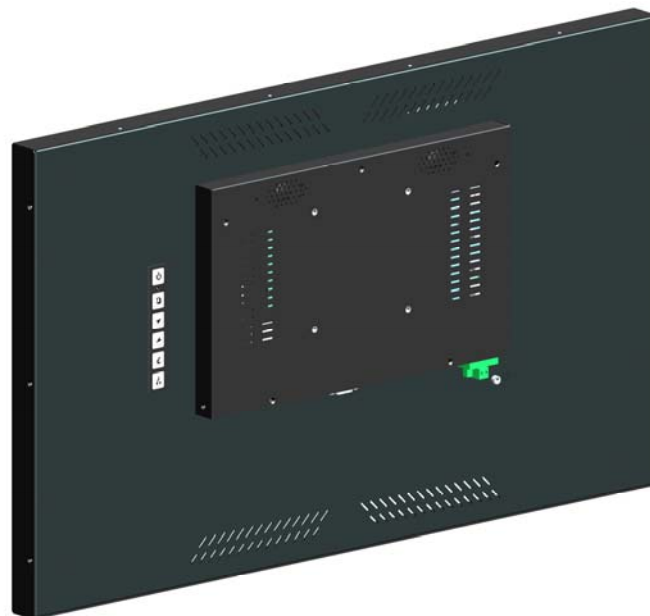

Main Feature

- 27" Full HD LED Panel support 1920 × 1080 pixels
- Heavy duty steel chassis with strengthen glass
- Rugged construction design
- Input signal : VGA + HDMI + Audio
- Build in 2 x 8 Watts stereo speaker
- OSD control keys to optimize the display
- AC 100-240V wide range external AC adapter
- Meet standard VESA hole (75x75 and 100x100 mm) and wall-mount bracket

Specification	
Product Model	ICM-27W / ICM-27WT
LCD Panel	Display Type : 27" Full HD LED Panel Resolution : 1920 x 1080 Max. color : 16.7M Luminance : 300 cd/m2 View Angel : 178° (H), 178° (V) Pixel Pitch : 0.311 x 0.311 mm Contrast Ratio : 3000 : 1 Response Time : 25 ms Power Consumption : 45 Watt LCD MTBF : 50,000hrs
Signal Input	VGA (15 pin D-sub connector) + HDMI + audio input (audio jack)
Protect Glass	3 mm strengthen glass

Speaker	Built-in 2x stereo speakers(8 watt)
OSD	Brightness, Contrast, H/V Position, Color, Phase, Clock, PIP, Auto tune and recall
Touch Screen (optional)	Internal USB or RS-232 interface controller Type: Analog resistive type : 25VDC ≥ 20MΩ Resolution: continuous Light transmission: 80% or more Power consumption:<5V @1mA Surface hardness : 3H Operating force : ≤100g Life expectancy : 35 Million Operation system : Window 2000 / XP / 7 / 10 /11, CE, DOS , Linux
Signal Connectivity (optional)	AV input (BNC) + VGA +HDMI + Audio
Power Supply	Input: 100-240VAC,50/60Hz Output: DC12V@ 5A /60W ,external ac adapter
Construction	Heavy duty steel chassis
Environment	Operating temperature: 0 °C to 50 °C Storage temperature: -20 °C to 60 °C Storage humidity: 10% to 95%, non-condensing Vibration: 17 to 500HZ 1G PTP Shock: 1G /peak(11m sec)
Safety	CE/FCC/Rohs
Dimension W x H x D (mm)	665 x 400 x 50 mm
Weight	NET weight: 14 KG; Gross weight: 17 KG

Ordering Information

ICM-27W	27" Industrial Chassis Monitor (Wide Screen)
ICM-27WT	27" Industrial Chassis Monitor (Wide Screen), with Touch Screen
Optional: AV	Add AV Input (BNC)

Structure Diagram

