


Model: IDPO-215W
21.5" flat fronted PCT touch Industrial grade monitor

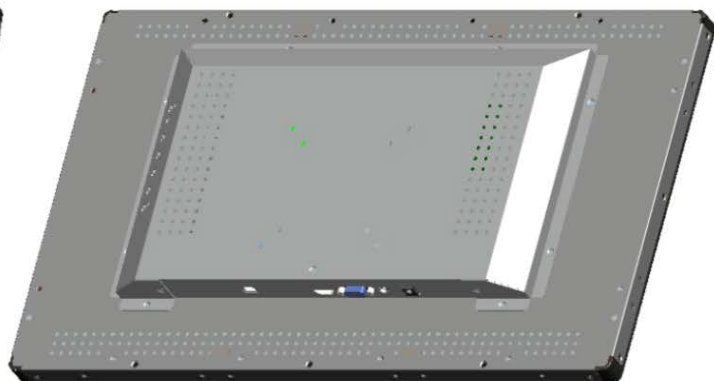

Main Feature

- 21.5" LCD wide screen panel with LED backlight for long service life
- Wide operating temperature 0 to 50° C
- Regular brightness 250 cd/m2
- True flat surface , contemporary pro-flat style
- Wide viewing angle horizontally and vertically
- Open frame design, no additional enclosures or metalwork required
- Multi-touch PCT touch screen with USB interface
- Flexible signal interface: VGA & HDMI
- Back VESA and four sides M4 screw mounting

Specification	
Product Model	IDPO-215W
LCD Panel	Display Type : 21.5" Full HD Resolution : 1920 x 1080 Luminance : 250 cd/m2 View Angel : 178°(H), 178°(V) Maximum Color : 16.7M Contrast Ratio : 1000 : 1 MTBF : 30,000hrs
Signal Input	VGA + HDMI
OSD	Brightness, Contrast, H/V Position, Color, Phase, Clock, Auto and Source
Touch Screen	Internal USB interface controller - Projected Capacitive Multi Touch (10 points) Light transmission: 85% or more Surface hardness : 7H Operation system : Windows XP / 7 / 8.1 / 10; Linux
Power Supply	Input: 100~240VAC,50/60Hz Output: DC12V@ 5A /60W ,external AC adapter
Construction	Heavy duty steel chassis

<p>Environment</p>	<p>Operating temperature: 0°C to 50°C Storage temperature: -10°C to 60°C Storage humidity: 10% to 95%, non-condensing Vibration: 5 to 500HZ 1G PTP Shock: 15G peak (11m second)</p>
<p>Dimension W x H x D (mm)</p>	<p>518 x 310 x 53</p>

Structure Diagram (Unit mm, Panel cut-off: 514 x 305mm)

