


Model: KVM-1701COMBO-DR



1U Rackmount Dual Rail 17"  
1 port LCD KVM with KVM cable  
- PS/2 & USB Interface

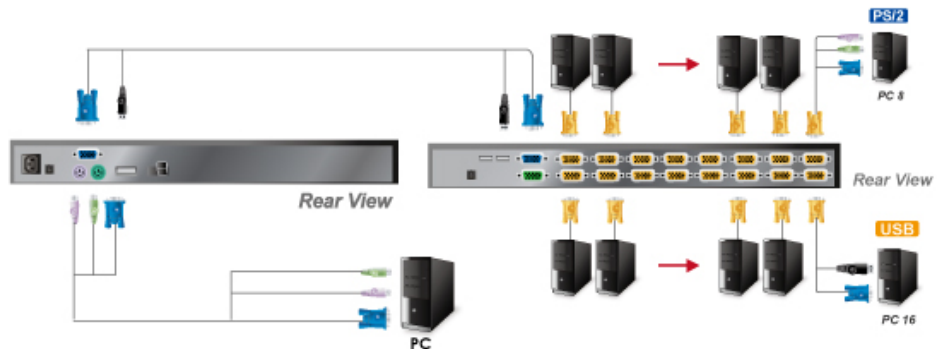

## Main Feature

- LCD Monitor & Keyboard could pull-out & push back independently
- Support combo interface for PS/2 & USB
- Controls one set of PC or KVM-Switch
- OSD ( on screen display ) function for LCD display
- No software & driver required - Hot pluggable
- Built-in AUTO self-locking & releasing mechanism system
- Metal case, rack mountable - Integrated 17'' LCD Panel with 104 keys keyboard and touchpad

Specification		
Product Model		KVM-1701COMBO-DR
LCD	Size	17" TFT
	Resolution	1280 X 1024
	Max. color	16.7M
	Luminance	300 cd/m2
	Power	AC Inlet

Computer Connections	VGA DB-15(Female)	1
	Keyboard MD-6 (Female)	1
	Mouse MD-6 ( Female)	1
	USB( A type )	1
Button / Switch	Power Switch	Rock Switch
	LCD Adjustment	Button
Auto-Scan Intervals		5 ~ 99 Sec.
Keyboard / mouse Emulation		PS/2
Power Input Rating		100-240VAC ; 50/60Hz ; 1A
Power Consumption		37W
Environment	Operating Temperature	0-50°C
	Store Temperature	-20-60°C
	Humidity	0-80% RH , NC
Housing		Heavy Duty Steel
Size		1U 19" Rack mount
Net / Gross Weight		23 / 27 kg
Dimensions (W*D*H)		482 x 700 x 44 mm
Certificated		CE/FCC
<b>Order Information</b>		
KVM-1701COMBO-DR		1U Rackmount Dual Rail 17" 1 port LCD KVM, with KVM cable - PS/2 & USB Interface

## Structure Diagram Unit :mm

