



Model: KVM-1908COMBO-DR
1U Rackmount Dual Rail 19" TFT LCD, with 8 port KVM switch



Main Feature

- LCD Monitor & Keyboard could pull-out & push back independently
- One console controls up to 8 / 16 directly connected computers
- Dedicated daisy chain port to expand up to 240 servers
- One additional one USB Local console to add local KB/Mouse & VGA.
- Support multiple form - PS/2 and USB computers (SUN and MAC)
- Support DOS, Windows, Netware, Unix, Linux, Mac OS
- Hot Pluggable - Add or remove connected PCs without having to power down the KVM switch or computers
- No software required - easy PC selection via Push Buttons, Hot Keys or OSD (on screen display)
- Auto Scan Mode for monitoring PCs
- Firmware upgradeable for staying compatible with new coming computers
- Durable 104-key keyboard and touch pad
- Self-locking and auto release rails for ultra-convenience.

RearView

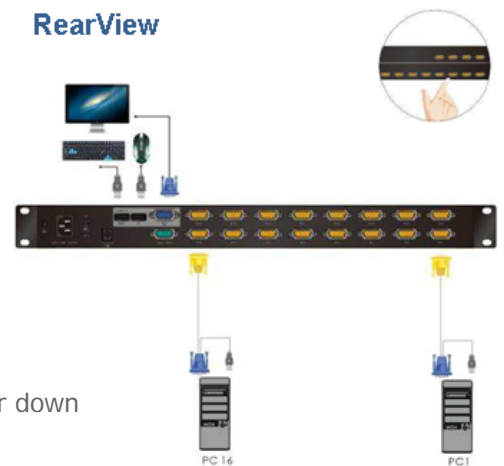

Specification		
Product Model		KVM-1908COMBO-DR
LCD	Size	19" TFT
	Resolution	1280 X 1024
	Max. color	16.7M
	Luminance	300 nit (LED Backlight)
	View Angel	178° (H) , 178° (V)
	Contrast Ratio	1000 : 1
Computer Connections	Direct	8
	Maximum	232 / 240
Computer Port Selection		OSD, Hot Key, Push Button
Connector	Power	AC Inlet
	Computer	HDB 15 Female
	Daisy Chain	HDB 15 Female
	Local Console	2 x USB for Keyboard & Mouse, 1 x VGA for Monitor
CAT5-Based Remote Transmit / Receive Module (Optional: KV-300)		KVM Extender transmits KVM up to 300m away from a computer using Cat5/5e/6 cable
LEDs	Port	8
	Power	1
Button / Switch	Power Switch	Rock Switch
	LCD Adjustment	Button
Hotkey		Provide various Hotkey (Scroll-Lock/ Cap-Lock/ Num-Lock/ Alt/ Ctrl)
Auto-Scan Intervals		5 ~ 99 Sec.
Video Resolution (Local Console)		1280 x 1024
Power Input Rating		100-240VAC ; 50/60Hz ; 1A
Environment	Operating Temperature	0-50°C
	Store Temperature	-20-60°C
	Humidity	0-80% RH , NC
Housing		Heavy Duty Steel
Size		19" Rack mount, 1U
Net Weight		16KG
Gross Weight		19.5KG
Dimensions (W*D*H)		482 x 720 x 44 mm
Packing Dimensions (W*D*H)		590 x 850 x 170 mm
Order Information		
KVM-1908COMBO-DR		1U Rackmount Dual Rail 19" TFT LCD, with 8 port KVM switch
KCVU-018		USB, 2 in 1 KVM Cable , 1.8 meter length
KCVU-030		USB, 2 in 1 KVM Cable , 3.0 meter length
KCVU-050		USB, 2 in 1 KVM Cable , 5.0 meter length
KCVP-018		PS/2, 3 in 1 KVM Cable , 1.8 meter length
KCVP-030		PS/2, 3 in 1 KVM Cable , 3.0 meter length

Structure Diagram Unit :mm

