


**Model: KVM-2101COMBO**

1U Rackmount 21.5" 1 port LCD KVM, with 1.8 meters KVM cable - PS/2 & USB Interface



Front View

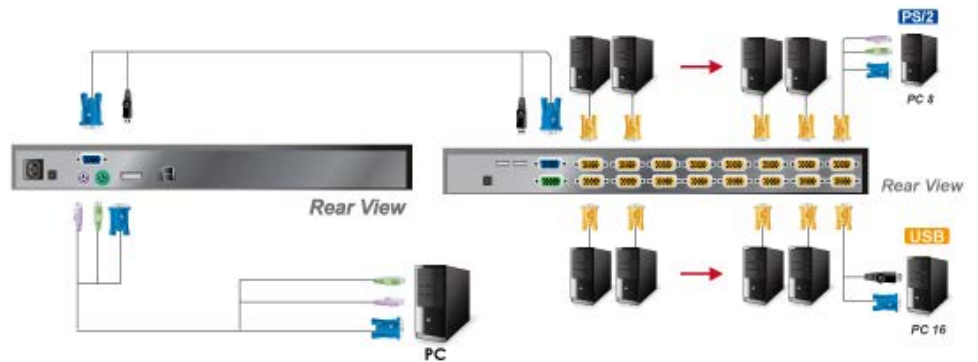

**Features**

- 21.5" Full HD LED Panel support 1920 × 1080 pixels
- Support combo interface for PS/2 & USB
- Controls one set of PC or KVM-Switch
- OSD ( on screen display ) function for LCD display
- No software & driver required - Hot pluggable
- Built-in AUTO self-locking mechanism system
- Metal case, rack mountable - Integrated 24" LED Panel with 104 keys keyboard and touchpad

Specification		
Product Model		KVM-2101COMBO
LCD	Size	21.5"
	Resolution	1920 X 1080
	Max. color	16.7M
	Luminance	250 cd/m2

Computer Connections	Power	AC Inlet
	VGA DB-15 (Female)	1
	Keyboard MD-6 (Female)	1
	Mouse MD-6 (Female)	1
	USB( A type )	1
Button / Switch	Power Switch	Rock Switch
	LCD Adjustment	Button
Auto-Scan Intervals		5 ~ 99 Sec.
Power Input Rating		100-240VAC ; 50/60Hz ; 1A
Power Consumption		48W
Environment	Operating Temperature	0 - 50°C
	Store Temperature	-20 - 60°C
	Humidity	0-80% RH , NC
Housing		Heavy Duty Steel
Size		1U, 19" Rack mount
Net / Gross Weight		17 / 24 kg
Dimensions (W*D*H)		448 x 776 x 42 mm
Packing Dimensions (W*D*H)		710 x 980 x 180 mm
<b>Order Information</b>		
<b>KVM-2101COMBO</b>	1U Rackmount 21.5" 1 port LCD KVM, with 1.8 meters KVM cable - PS/2 & USB Interface	

## Structure Diagram Unit :mm

