


Model: OFM-21WT-AD
 21.5" Industrial Open Frame Panel Monitor with IR Touch



Main Feature

- LED Panel - Higher Brightness; Longer Life Span; Better Viewing Angle; Less Power Consumption ...
- 21.5" Full HD LED Panel support 1920x1080 pixels
- Input signal : VGA + HDMI + Audio
- OSD control keys to optimize the display
- 12 VDC input, with AC 100-240V wide range external AC adapter
- Panel mounting design
- Rugged construction design with Heavy Duty Steel Chassis
- Support standard VESA mounting (75 & 100 mm)

Specification	
Product Model	OFM-21WT-AD
LCD Panel	Display Type : 21.5" Full HD (AUO LED Panel) LCD Resolution : 1920 x 1080 Luminance : 250 cd/m2 View Angel : 178° (H), 178° (V)
Signal Input	VGA + HDMI + Audio
OSD	Brightness, Contrast, H/V Position, Color, Phase, Clock, auto tune and Source
Touch Screen	Internal USB or RS-232 interface controller - <u>IR Touch</u> Type: Infrared position sensor Resolution: 4096 x 4096 Light transmission: 95% - 100% Power consumption: <5V @2mA Positional Accuracy: 2mm Responding time: <16ms Touch Activation Force: No pressure required Operation system : Window XP / 7 /8.1 / 10 / CE, DOS , Linux
Power Supply	Input: 100~240VAC,50/60Hz Output: DC12V@ 5A /60W ,external ac adapter

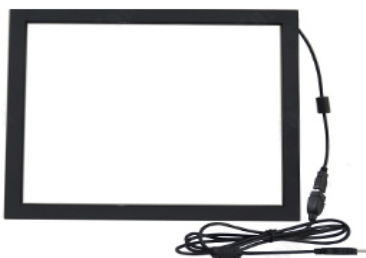

Construction	Heavy duty steel chassis
Environment	Operating temperature: 0°C to 50°C Storage temperature: -10°C to 60°C Storage humidity: 10% to 95%, non-condensing Vibration: 5 to 500HZ 1G PTP Shock: 15G peak (11m second)
Compliance	CE/FCC/ROHS
Dimension W x H x D (mm)	546.6 x 299.2 x 45.5

Structure Diagram Unit: mm

